

Surface Temperature Sensor

Washer Type




HAWK

Since 1971

P-41

W Type

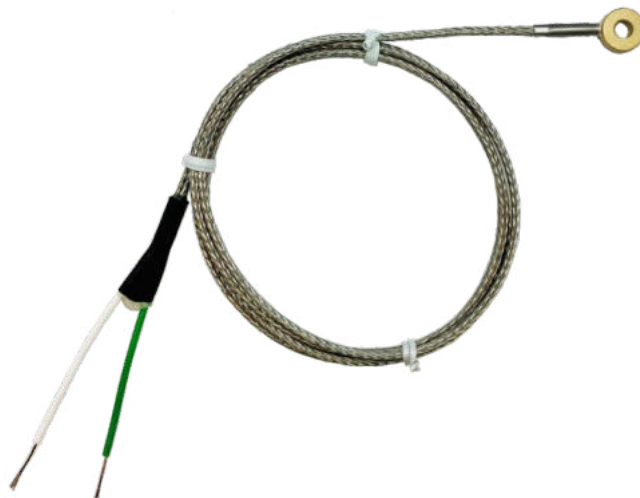

- ▶ Resistance/Thermocouple Elements
- ▶ Easy and quick installation (minimal mass and close contact)
- ▶ Flexible (can conform to curved or uneven surface)
- ▶ Usually attached with adhesive backing, thermal tape, or clamping

The **I category temperature sensor** is the device to measure surface temperature of an object such as pipe, bar, tube, dusts or vessel walls. The typical sensing element can be in RTD (Resistance Temperature Detector) or thermocouple (T/C).

The HAWK **W model** washer type temperature sensor is ideal for flat or slightly curved surface measurements. Its washer-shaped ring terminal enables easy and secure mounting under bolts or screws, ensuring consistent thermal contact and reliable temperature readings. Because of this design, it suits many industrial, commercial, and HVAC applications that require accurate surface temperature monitoring.

Specifications

Sensing Element:

K(Ni-Cr, Ni-Al)...0/+1200°C,
E(Ni-Cr, Ni-Cu)...-200/+900°C,
J(Fe, Ni-Cr)...-50/750°C,
T(Cr, Ni-Cr)...-200/+350°C,
N(Ni-Cr-Si, Ni-Si)...0/1200°C,
Platinum 100Ω/500Ω/1000Ω,
Nickel 120Ω, Copper 10Ω,
Single, Double or Tripple Resistance,
Element.

Tolerance (°C)-PT100:

JIS/DIN

ClassA	ClassB
$\pm(0.15+0.002 t)$	$\pm(0.3+0.005 t)$

ASTM

ClassA	ClassB
$\pm(0.13+0.0017 t)$	$\pm(0.25+0.0042 t)$

Washer Style:

Rectangle, Square or Round

Washer Material:

SS304, SS316, SS316L, Brass

Transition Style:

Standard, Spring or Armor.

Insulation/Conductor:

Fiberglass, PVC or PTFE.

Wire Termination:

Plain Leads-not stripped, Stripped.
Lead 3mm, Spade lug,
Standard Male Plug, Mini Male Plug,
Standard Female Socket,
Mini Female Socket,
Terminal Pin or others.

Surface Temperature Sensor

Washer Type



HAWK

Since 1971



P-4I

Tolerance Thermocouple

Code	JIS C1605/DIN(IEC 584-2)			ASTM E230
	Class 1	Class 2	Class 3	STD / SP
K-TYPE	-40°C~375°C ±1.5°C	-40°C~333°C ±2.5°C	-167°C~40°C ±2.5°C	STD...±0.75% or ±2.2°C(4°F)
	375°C~1000°C ±0.004 · t	333°C~1200°C ±0.0075 · t	-200°C~-167°C ±0.0015 · t	SP...±0.4% or ±1.1°C(2°F)
N-TYPE	-40°C~375°C ±1.5°C	-40°C~333°C ±2.5°C	-167°C~40°C ±2.5°C	STD...±0.75% or ±2.2°C(4°F)
	375°C~1000°C ±0.004 · t	333°C~1200°C ±0.0075 · t	-200°C~-167°C ±0.0015 · t	SP...±0.4% or ±1.1°C(2°F)
E-TYPE	-40°C~375°C ±1.5°C	-40°C~333°C ±2.5°C	-167°C~40°C ±2.5°C	STD...±0.5% or ±1.7°C(3.1°F)
	375°C~800°C ±0.004 · t	333°C~900°C ±0.0075 · t	-200°C~-167°C ±0.0015 · t	SP...±0.4% or ±1°C(1.8°F)
J-TYPE	-40°C~375°C ±1.5°C	-40°C~333°C ±2.5°C	-	STD...±0.75% or ±2.2°C(4°F)
	375°C~750°C ±0.004 · t	333°C~750°C ±0.0075 · t	-	SP...±0.4% or ±1.1°C(2°F)
T-TYPE	-40°C~125°C ±0.5°C	-40°C~133°C ±1°C	-67°C~40°C ±1°C	STD...±0.75% or ±1°C(1.8°F)
	125°C~350°C ±0.004 · t	133°C~350°C ±0.0075 · t	-200°C~-67°C ±0.0015 · t	SP...±0.4% or ±0.5°C(0.9°F)

Measuring Junction Type

(A)



Grounded Type

(B)



Ungrounded Type

(C)



Ungrounded Separated Type




Exposed Type

(A) The thermocouple is grounded to the protective tube. It is with fair response than unground type. It is not suitable for the noisy and dangerous location such as electromagnetic induction interfered by radio frequency.

(B) The thermocouple is covered with insulator. It responds slower than grounded type. For most applications, it can ensure a long-life. It is available in two control loop separately.

(C) The thermocouple is exposed. It is with rapid response, but not good in airtightness, insulation and mechanical strength.

Dimensions



Surface Temperature Sensor

Washer Type



HAWK

Since 1971




P-4I

Insulation/Conductor

F

PTFE insulation cable



G

Glass coating shield SUS cover insulation cable




P

Fiberglass insulation cable



C

PVC insulation cable

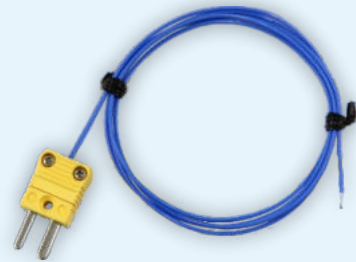

Transition Type


A

SS Armor Transition




P

Standard Transition

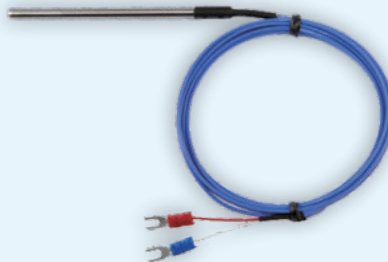

S

Spring Transition

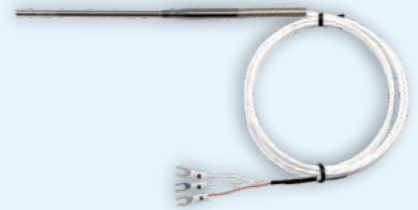

Surface Temperature Sensor

Washer Type



HAWK

Since 1971



P-4I

Options



ZC Certificate of Accuracy (Factory)

ZE Certificate of Accuracy (TAF)


ZI Certificate of Accuracy (NIST)



ZY Stainless Steel Tag Plate

Typical Applications

- ▶ Monitoring automotive surface temperature (engine components, exhaust systems, or brake parts during testing or development).
- ▶ HVAC system duct surface measurement (Monitors heating, ventilation, and air conditioning units to maintain efficiency and detect faults).
- ▶ Industrial equipment surface monitoring (motors, pumps, compressors, and other machinery to ensure safe operation and prevent overheating).
- ▶ Process temperature control (e.g., chemical processing, plastics molding, and food production where thermal data is critical).

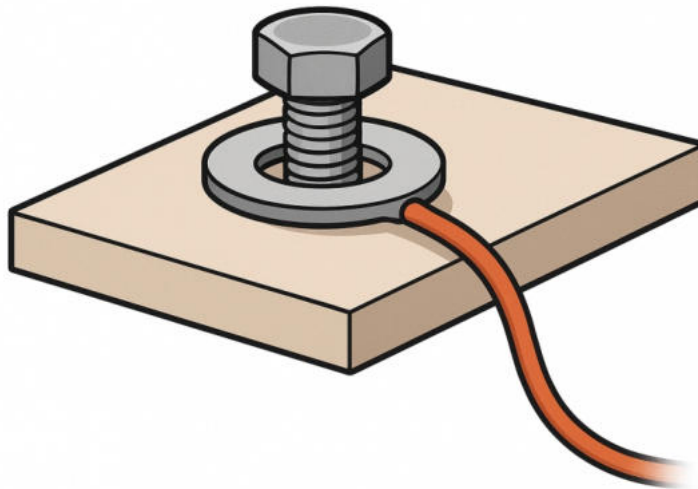

Surface Temperature Sensor

Washer Type



HAWK

Since 1971



P-4I

Order Information

P-4I-W6 005 K J3 A 006 010 N 000 G S 2 P 100 C P H-XX

Option
 ZC-Certificate of Accuracy (Factory)
 ZE-Certificate of Accuracy (TAF)
 ZI-Certificate of Accuracy (NIST)
 ZY-Stainless Steel Tag Plate
 Please refer to the options and write down the code which you need.

Wire Termination
 P-Plain Leads-not stripped
 S-Stripped Lead 3mm
 L-Spade lug T-Terminal Pin
 M-Standard Male Plug
 A-Mini Male Plug
 F-Standard Female Socket
 C-Mini Female Socket

Insulation / Conductor C-PVC N-Nickel F-PTFE G-Glass P-Fiberglass SUS Cover

Lead/Armor Length	000-Non	06C-6"	15C-16"	050-50mm	1M1-1.1m
	2C5-2 1/2"	09C-9"	18C-18"	100-100mm	1M5-1.5m
	04C-4"	12C-12"	24C-24"	900-900mm	10M-10m and so on...

Transition Type P-Standard Transition S-Spring Transition A-Armor Transition

Wires 2-2 wires 3-3 wires 4-4 wires 6-6 wires 8-8 wires 0-non

Number of elements S-Single Element D-Double Elements T-Triple Elements

Type of Junction G-Grounded U-Ungrounded L-Others E-Exposed N-None

Lagging Extension 000-Non

Shank Design N-None

Washer Diameter	C25-1/4"	C50-1/2"	C60-0.6"	C90-0.9"	1C2-1.2"	1C6-1.6"	2C4-2.4"
	005-5mm	010-10mm	015-15mm	020-20mm	025-25mm	and so on...	

Thickness C25-1/4" C32-5/16" 006-6mm 008-8mm 010-10mm 012-12mm and so on...

Stem Material A-SS304 S-SS316 W-SS316L B-Brass

Class	J1-JIS/DIN Class 1	EA-JIS/DIN Class A-200/+100°C	LA-JIS/DIN Class A-30/+250°C	MA-JIS/DIN Class A-50/+450°C	HA-JIS/DIN Class A 0/+650°C
	J2-JIS/DIN Class 2	EB-JIS/DIN Class B-200/+100°C	LB-JIS/DIN Class B-30/+250°C	MB-JIS/DIN Class B-50/+450°C	HB-JIS/DIN Class B 0/+650°C
	J3-JIS/DIN Class 3	AA-ASTM Class A-200/+100°C	BA-ASTM Class A-30/+250°C	CA-ASTM Class A-50/+450°C	DA-ASTM Class A 0/+650°C
	AT-ASTM Standard AP-ASTM Special	AB-ASTM Class B-200/+100°C	BB-ASTM Class B-30/+250°C	CB-ASTM Class B-50/+450°C	DB-ASTM Class B 0/+650°C

Sensor Type K-K-Type J-J-Type N-N-Type D-D-Type P-Platinum 100Ω D-Platinum 1000Ω
 E-E-Type T-T-Type C-C-Type A-Platinum 500Ω I-Nickel 120Ω C-Copper 10Ω

Washer Hole Diameter C25-1/4" C32-5/16" 005-5mm 006-6mm 008-8mm 010-10mm 012-12mm and so on...

Surface Temperature Sensor

Washer Type



P-4I

Limited Warranty and Liability

HAWK GAUGE CO.,LTD warrants all its mechanical instruments to be free from defects in materials and workmanship. HAWK agrees to repair or replace any thermometers if returned to our factory, transportation charges prepaid, and after which examination reveals is to be defective due to faculty workmanship or material.

This warrant should not apply to subject to the following terms and conditions:

- A. The product has not been subjected to misuse, neglect, abuse , accident, incorrect mounting, improper use or misapplication such as negligence, accident, vandalism, shock or vibration.
- B. The performance of any system of which HAWK's products are a component part.
- C. The product has not been exposed to any other service, range or environment of greater severity than that for which the products were designed.
- D. The product has not been altered or repaired by anyone except HAWK GAUGE or its authorized service agencies.
- E. The serial number or date code has not been removed, defaced or changed.
- F. The actual pressure&temperature occurring exceed the values specified for HAWK Thermometer.

Unless otherwise specified in a manual or warranty card, or agree to in a writing signed by HAWK GAUGE office, HAWK Thermometer products shall be warranted for one years from the date of sale.

This warranty is in lieu of all other warranties expressed or implied, and of all obligations or liabilities on its part for damages including but not limited to consequential damages, following the use of misuse of instruments sold by it. No agent is authorized to assume for it any liability except as set forth above.

Note

HAWK GAUGE CO.,LTD reserves the right to make product improvements and change its specifications at any time stated throughout this brochure without notification. Please contact the factory on all critical dimensions and specifications for verification.

HAWK GAUGE is not expert in the customer's technical field and therefore doesn't warrant suitability of it's product for the application selected by customer.



1971 - 2025

Data Sheet No: MKDP4IWA0-E