

# Head Assembly Thermocouple Detector

Explosion Proof Type



P-4B

CE

SX Series



- Noble/Base Metal Sensing Elements
- 316 Stainless Steel Head
- Wide Temperature Ranges from -200°C to 2300°C
- Various Sizes and Materials for your applications
- IP68 Explosion Proof for applications in hazardous areas

A temperature sensor is a device to measure temperature by an electrical signal. The typical sensing element is RTD (Resistance Temperature Detector) or thermocouple (T/C).

The RTD is a variable resistor that will change its electrical resistance depending on temperature. The platinum is commonly used as an RTD sensing element due to its purity, linearity and stability over a wide range of temperatures. A thermocouple is made by two dissimilar metals that generate electrical voltage in direct proportion to changes in temperature. **HAWK SX model** is with 316 stainless steel explosion proof head assembly and a element installed in a metallic drawn and top-welded stem tube. It is a intrinsically safety designs which are most widely used for applications in hazardous areas.

## Specifications

### Sensing Element:

K(Ni-Cr, Ni-Al)...0/+1200°C,  
E(Ni-Cr, Ni-Cu)...-200/+900°C,  
J(Fe, Ni-Cr)...-50/+750°C,  
T(Cr, Ni-Cr)...-200/+350°C,  
N(Ni-Cr-Si, Ni-Si)...0/+1200°C,  
D(3%W.Re, 25%W.Re)...-200/+2300°C,  
C(5%W.Re, 26%W.Re)...-200/+2300°C,  
B(30%Pt.Ph, 6%Pt.Ph)...-200/+1700°C,  
R(13%Pt.Ph, Pt)...0/+1600°C,  
S(10%Pt.Ph, Pt)...0/+1550°C.

### Stem Diameter:

1/4" diameter-standard, 3/8", 1/2", 6mm, 8mm, 10mm, 12mm, other diameters available.

### Stem Material:

SS304, SS316, SS316L, SS310, Inconel.

### Stem Length:

2 1/2", 4", 6", 9", 12", 15", 18", 24" standard lengths, available in other stem lengths.

### Head&Conduit:

Casting 316 Stainless Steel,  
1/2"NPT, 3/4"NPT, M20\*1.5, M25\*1.5

### Thread Connection Style:

Fixed Rigid Male/Female,  
Sliding Compression Male/Female,  
Plain.  
1/2", 3/8", 1/4" NPT standard, JIS,  
DIN, M14\*1.0 and M20\*1.5 available.

### Flange Connection Style:

ANSI Flange 1/2".....2"  
(150LB...2500LB rating),  
JIS Flange 15A.....50A  
(10K.....63K rating),  
DIN Flange DN15.....DN50  
(PN2.5.....PN400Bar rating).

### Sanitary Connection Style:

1/2"(DN15).....5"(DN125)  
Tri-Clamp, APC, IDF, SMS,  
Cherr-Tank, Spud, DIN11851,  
Cheer-Brrell I Line, RTJ(APV).

### Terminal Block (Insulation):

Ceramic (Al<sub>2</sub>O<sub>3</sub>).

### Weatherproof

IP68.

# Head Assembly Thermocouple Detector

Explosion Proof Type




P-4B

## Tolerance

	JIS C1605/DIN(IEC 584-2)			ASTM E230
Code	Class 1	Class 2	Class 3	STD / SP
B-TYPE	-	-	600°C~800°C ±4°C	STD...±0.5%
	-	600°C~1700°C ±0.0025 · t	600°C~1700°C ±0.005 · t	SP...±0.25%
R-TYPE	0°C~1100°C ±1°C	0°C~600°C ±1.5°C	-	STD...±0.25% or ±1.5°C(2.7°F)
	-	600°C~1600°C ±0.0025 · t	-	SP...±0.1% or ±0.6°C(1.1°F)
S-TYPE	0°C~1100°C ±1°C	0°C~600°C ±1.5°C	-	STD...±0.25% or ±1.5°C(2.7°F)
	-	600°C~1600°C ±0.0025 · t	-	SP...±0.1% or ±0.6°C(1.1°F)
K-TYPE	-40°C~375°C ±1.5°C	-40°C~333°C ±2.5°C	-167°C~40°C ±2.5°C	STD...±0.75% or ±2.2°C(4°F)
	375°C~1000°C ±0.004 · t	333°C~1200°C ±0.0075 · t	-200°C~-167°C ±0.0015 · t	SP...±0.4% or ±1.1°C(2°F)
N-TYPE	-40°C~375°C ±1.5°C	-40°C~333°C ±2.5°C	-167°C~40°C ±2.5°C	STD...±0.75% or ±2.2°C(4°F)
	375°C~1000°C ±0.004 · t	333°C~1200°C ±0.0075 · t	-200°C~-167°C ±0.0015 · t	SP...±0.4% or ±1.1°C(2°F)
E-TYPE	-40°C~375°C ±1.5°C	-40°C~333°C ±2.5°C	-167°C~40°C ±2.5°C	STD...±0.5% or ±1.7°C(3.1°F)
	375°C~800°C ±0.004 · t	333°C~900°C ±0.0075 · t	-200°C~-167°C ±0.0015 · t	SP...±0.4% or ±1°C(1.8°F)
J-TYPE	-40°C~375°C ±1.5°C	-40°C~333°C ±2.5°C	-	STD...±0.75% or ±2.2°C(4°F)
	375°C~750°C ±0.004 · t	333°C~750°C ±0.0075 · t	-	SP...±0.4% or ±1.1°C(2°F)
T-TYPE	-40°C~125°C ±0.5°C	-40°C~133°C ±1°C	-67°C~40°C ±1°C	STD...±0.75% or ±1°C(1.8°F)
	125°C~350°C ±0.004 · t	133°C~350°C ±0.0075 · t	-200°C~-67°C ±0.0015 · t	SP...±0.4% or ±0.5°C(0.9°F)

## Measuring Junction Type

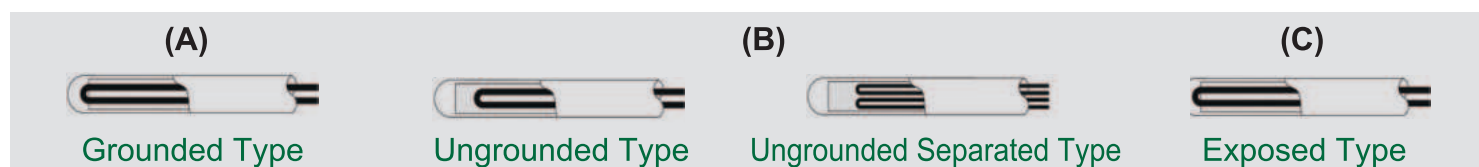

(A) The thermocouple is grounded to the protective tube. It is with fair response than unground type. It is not suitable for the noisy and dangerous location such as electromagnetic induction interfered by radio frequency.

(B) The thermocouple is covered with insulator. It responds slower than grounded type. For most applications, it can ensure a long-life. It is available in two control loop separately.

(C) The thermocouple is exposed. It is with rapid response, but not good in airtightness, insulation and mechanical strength.


# Head Assembly Thermocouple Detector

## Explosion Proof Type

### Process Connection

#### Fixed/Rigid Type:

The fixed/rigs type is the most common connection. This threaded type connection is directly attached to the process by means of a male or female NPT, BSP, BSPT or other threads.

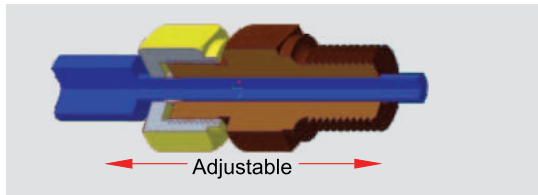


#### Sliding Type:

The sliding type allows to adjust the variable inserted length of bulb for best performance.



#### Plain Type:

The plain bulbs are suitable for open tank applications without any pressure or combine with thermowell for the applications where fixed installation is not required.

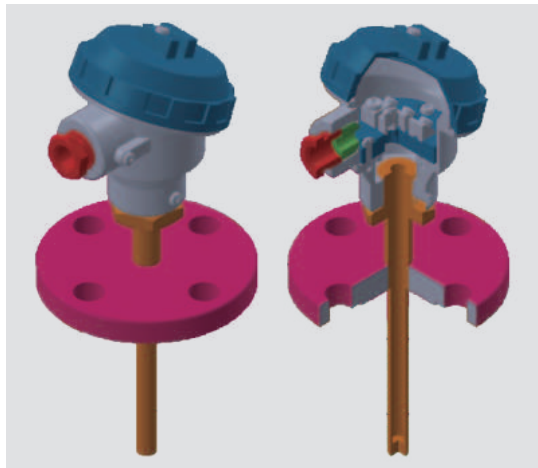

#### Flange Type:

The flange connection is directly attached to the process by means of a ANSI, DIN or JIS flange. This connection is most popular for a piping system and have been designed to meet the needs of standard industrial applications and installations.

**Sanitary Type:** The sanitary probes are designed for the sanitary/aseptic applications. These quick process connections including clamp, female thread with coupling nut or male thread enable frequent removal from the process when Cleaned In Place (CIP) or Steamed In Place (SIP).



# Head Assembly Thermocouple Detector



Explosion Proof Type






P-4B

## Head Style/Dimensions

### SX-Y Series

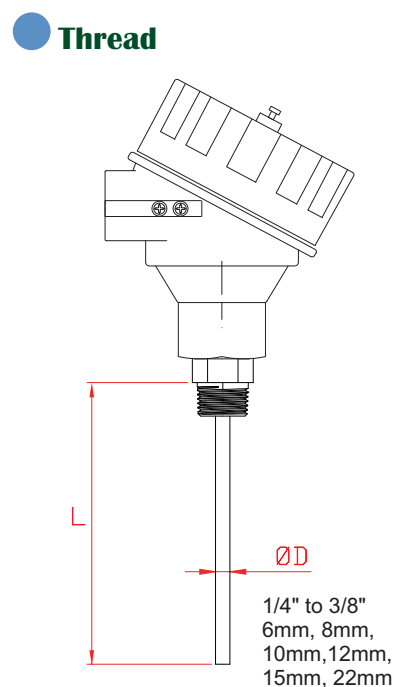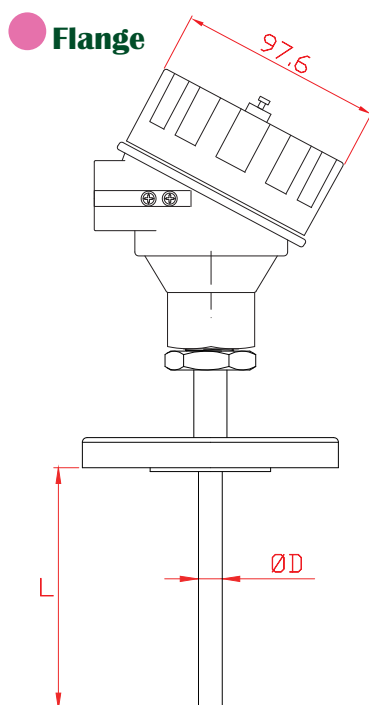

### ● Sanitary Clamp

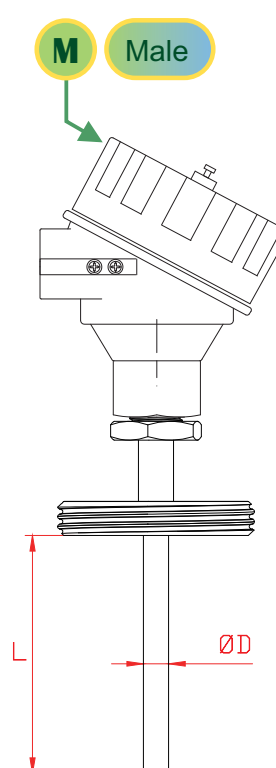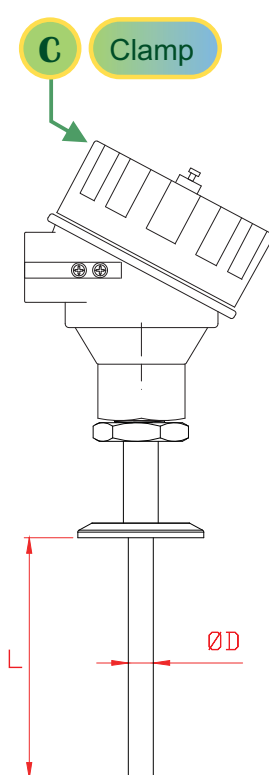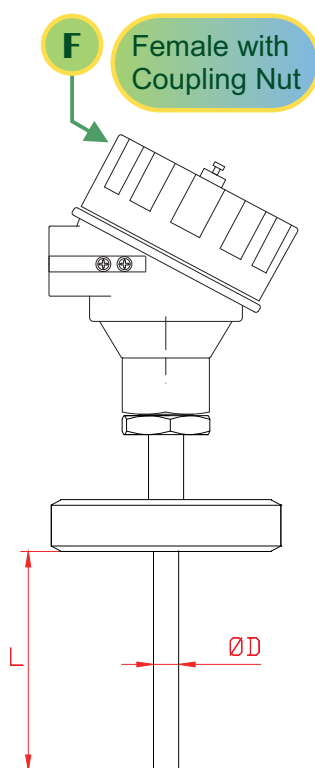

# Head Assembly Thermocouple Detector

Explosion Proof Type



**P-4B**

## Accessories/Options



**ZC** Certificate of Accuracy (Factory)

**ZE** Certificate of Accuracy (TAF)

**ZI** Certificate of Accuracy (NIST)



**ZN** NACE-MR0175 Heat Treatment



**ZX** Oxygen Cleaning

SS Armor Cable

**KA**



PTFE Insulation Cable

**KF**



PVC Insulation Cable

**KC**



Fiberglass Insulation Cable

**KC**




**TC** PFA Lining Stem



**TD** PTFE Coating Stem



**TE** Titanium Coating Stem

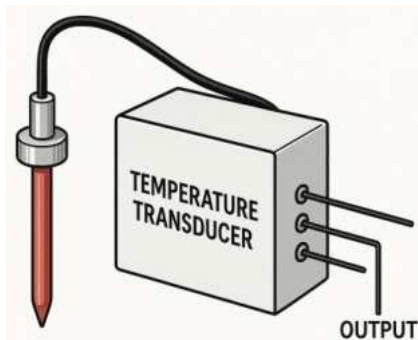

0...10V Transducer  
(Analog 3 Wires)

**VA**

0...5V Transducer  
(Analog 3 Wires)

**VB**

1...5V Transducer  
(Analog 3 Wires)

**VC**

0.5...4.5V Transducer  
(Analog 3 Wires)

**VD**

1...6V Transducer  
(Analog 3 Wires)

**VE**

4...20mA Transducer  
(Analog 2 Wires)

**VF**




**KN** Pipe Nipple Extension



**KU** Nipple Union  
Nipple Extension

Sheath



**KH** Sheath Type

**KS** Load Spring



**ZY** Stainless Steel Tag Plate





# Head Assembly Thermocouple Detector

Explosion Proof Type




## Thermowells


P-4B

In the case of following conditions, thermowell should be provide to protect bulb:

- 1) In case of corrosive fluid, thermowell with suitable material is necessary.
- 2) In case of high pressure, necessary to use thermowell suitable for operating pressure.
- 3) In case of fluid with flow, necessary to use thermowell suitable for flow and viscosity.
- 4) In case of fluid leaking out when taking off the thermometer, necessary to use thermowell.
- 5) In case of filled liquid in thermometer is leak out from bulb and it is harmful, necessary to use thermowell.

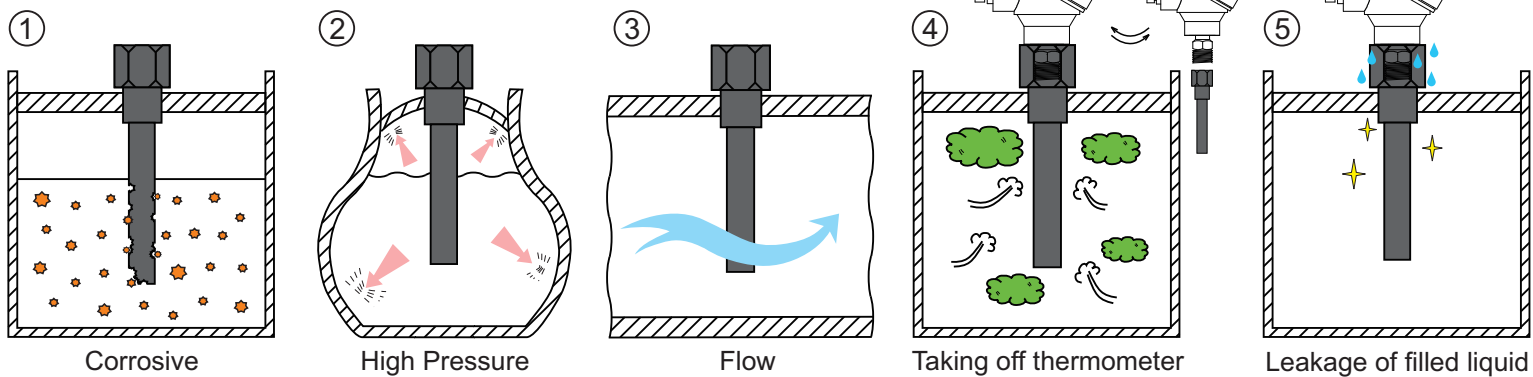

Please refer to HAWK thermowell data sheets for detailed information.

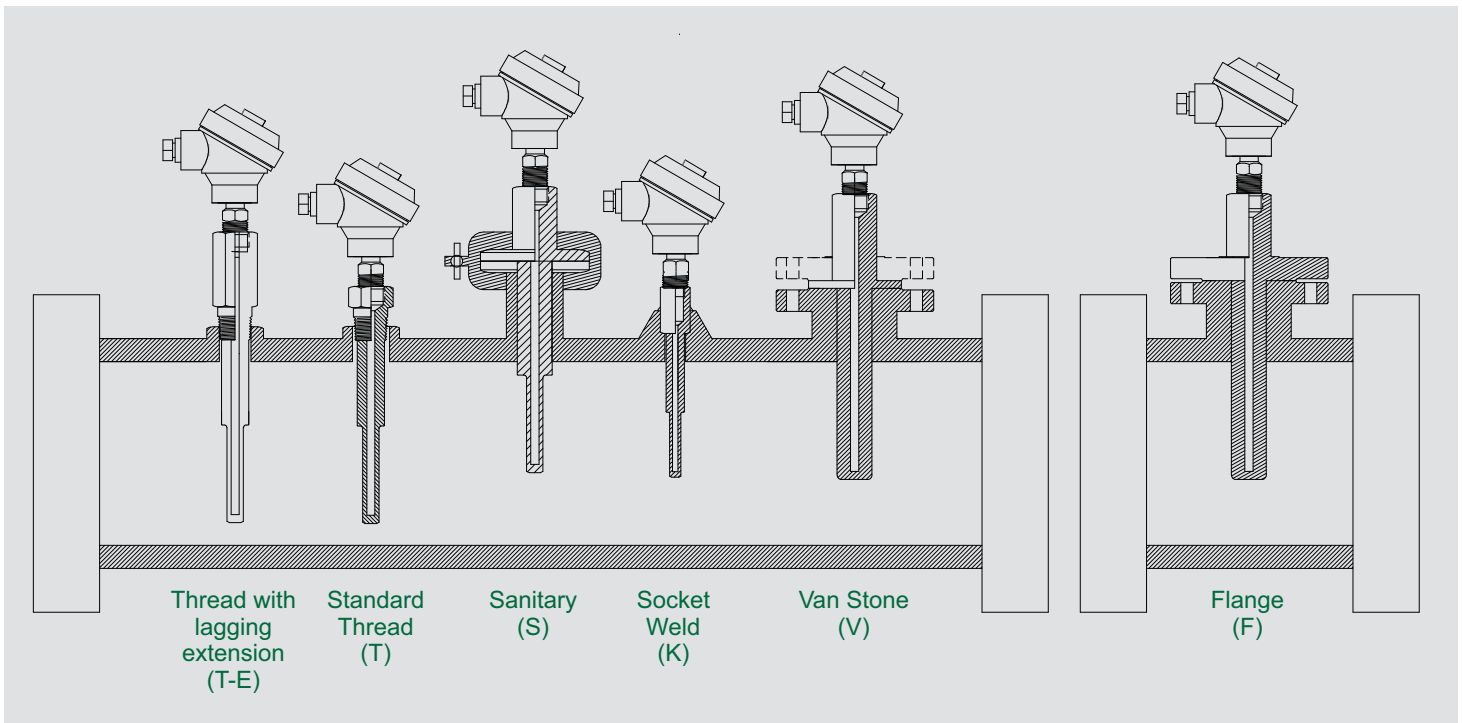

# Head Assembly Thermocouple Detector

Explosion Proof Type



**P-4B**

## Order Information

\* For Thread&Plain Style  
Example:

P-4B-SX **Y** **M2** **K** **J2** **S** **A** **C38** **2C5** **S** **000** **N** **S** **3** **H-** **XX**

**ZC**-Certificate of Accuracy (Factory)  
**ZE**-Certificate of Accuracy (TAF)  
**ZI**-Certificate of Accuracy (NIST)  
**ZN**-NACE-MR0175-2002 Heat Treatment  
**ZX**-Oxygen Cleaning  
**ZY**-Stainless Steel Tag Plate  
**KA**-SS Armor Cable  
**KS**-Load Spring  
**TC**-PFA Lining Stem  
Please refer to the options and write down the code which you need.

Option

**Wires** 2-2 wires 4-4 wires 8-8 wires  
3-3 wires 6-6 wires 9-9 wires

**Number of elements** S-Single Element T-Triple Elements  
D-Double Elements

**Type of Junction** G-Grounded E-Exposed L-Others  
U-Ungrounded N-None

**Cable Length** 000-No Wire 01M-1m 10C-10" 10F-10Feet  
050-50mm 10M-10m 50C-50" 50F-50Feet  
200-200mm and so on...

**Electrical Connection** Q-Head-1/2"NPT-F Z-Head-M25\*1.5-F S-Head-M20\*1.5-F  
X-Head-3/4"NPT-F L-Others

**Stem Length** 2C5-2 1/2" 06C-6" 12C-12" 075-75mm 200-200mm  
04C-4" 09C-9" 16C-16" 100-100mm 250-250mm  
24C-24" 150-150mm and so on...

**Stem Diameter** C25-1/4" C38-3/8" C50-1/2" 012-12mm and so on...  
006-6mm 008-8mm 010-10mm

**Stem Material** A-SS304 S-SS316 W-SS316L K-SS310 O-Inconel

**Shank Design** S-Straight R-Stepped T-Tapered

**Class** J1-JIS/DIN Class 1 J2-JIS/DIN Class 2 J3-JIS/DIN Class 3 AT-ASTM Standard AP-ASTM Special

**Sensor Type** K-K-Type E-E-Type J-J-Type T-T-Type N-N-Type C-C-Type D-D-Type B-B-Type R-R-Type S-S-Type

**Process Connection**  
**Style** M-Fixed Rigid Male F-Fixed Rigid Female T-Sliding Compression Male Y-Sliding Compression Female  
**Size** 1-1"NPT 3-3/8"NPT T-3/4"PT(R) B-1/4"PT(R) D-1/2"PF(G) J-M20\*1.5  
5-3/4"NPT 4-1/4"NPT A-1/2"PT(R) I-1"PF(G) H-3/8"PF(G) K-M14\*1.0  
2-1/2"NPT U-1"PT(R) G-3/8"PT(R) Q-3/4"PF(G) E-1/4"PF(G) and so on...  
OP-Plain OL-Others

**Head Style** Y-Casting 316 Stainless Steel, 1278g-ATEX Certified and FMCUS Certified

# Head Assembly Thermocouple Detector

Explosion Proof Type



**P-4B**



## Order Information

\* For Flange Style  
Example:

Process Connection  
**P-4B-SX Y V 1 R K J2 S A C38 2C5 S 000 N S 3 H- XX**

**Option**  
**ZC**-Certificate of Accuracy (Factory)  
**ZE**-Certificate of Accuracy (TAF)  
**ZI**-Certificate of Accuracy (NIST)  
**ZN**-NACE-MR0175-2002 Heat Treatment  
**ZX**-Oxygen Cleaning  
**ZY**-Stainless Steel Tag Plate  
**KA**-SS Armor Cable  
**KS**-Load Spring  
**TC**-PFA Lining Stem  
Please refer to the options and write down the code which you need.

**Wires** 2-2 wires 4-4 wires 8-8 wires  
3-3 wires 6-6 wires 9-9 wires

**Number of elements** S-Single Element T-Triple Elements  
D-Double Elements

**Type of Junction** G-Grounded E-Exposed L-Others  
U-Ungrounded N-None

**Cable Length** 000-No Wire 01M-1m 10C-10" 10F-10Feet  
050-50mm 10M-10m 50C-50" 50F-50Feet  
200-200mm and so on...

**Electrical Connection** Q-Head-1/2"NPT-F Z-Head-M25\*1.5-F S-Head-M20\*1.5-F  
X-Head-3/4"NPT-F L-Others

**Stem Length** 2C5-2 1/2" 06C-6" 12C-12" 075-75mm 200-200mm  
04C-4" 09C-9" 16C-16" 100-100mm 250-250mm  
24C-24" 150-150mm and so on...

**Stem Diameter** C25-1/4" C38-3/8" C50-1/2"  
006-6mm 008-8mm 010-10mm 012-12mm and so on...

**Stem Material** A-SS304 S-SS316 W-SS316L K-SS310 O-Inconel

**Shank Design** S-Straight R-Stepped T-Tapered

**Class** J1-JIS/DIN Class 1 J2-JIS/DIN Class 2 J3-JIS/DIN Class 3 AT-ASTM Standard AP-ASTM Special

**Sensor Type** K-K-Type E-E-Type J-J-Type T-T-Type N-N-Type  
C-C-Type D-D-Type B-B-Type R-R-Type S-S-Type

**Face** R-RF(Raise Face) M-LMF(Large Male Face) N-LFF(Large Female Face) O-SMF(Small Male Face)  
P-SFF(Small Female Face) L-LTF(Large Tongue Face) G-LGF(Large Groove Face) A-STF(Small Tongue Face)  
B-SGF(Small Groove Face) F-FF(Flat Face) J-RJ(Ring Joint Face) K-RFSF(Raise/Smooth Face)

	ANSI, DIN, HG20615, JIS	1-1/2"(DN15) 2-3/4"(DN20)	3-1"(DN25) 4-1 1/4"(DN32)	5-1 1/2"(DN40) 6-2"(DN50)	7-2 1/2"(DN65) 8-3"(DN80)	9-4"(DN100) A-5"(DN125)
Size	HG20592	PN0.25, 0.6, 1.0, 2.5, 6.3, 10, 16 B-DN20 C-DN25	D-DN32 E-DN40	F-DN50 G-DN65	H-DN80 I-DN100	J-DN125
		PN0.4, 1.6, 4.0 L-DN20 M-DN25	N-DN32 O-DN40	P-DN50 Q-DN65	R-DN80 S-DN100	T-DN125

Rating (Standard)	ANSI	A-150LB	B-300LB	C-400LB	D-600LB	E-900LB	F-1500LB	G-2500LB
	DIN	H-PN2.5Bar I-PN4.0Bar	J-PN6.0Bar K-PN10Bar	L-PN16Bar M-PN25Bar	N-PN40Bar O-PN64Bar	P-PN100Bar Q-PN160Bar	R-PN250Bar S-PN320Bar	T-PN400Bar
	JIS	U-PN 5K	V-PN 10K	W-PN 16K	X-PN 20K	Y-PN 30K	Z-PN 40K	0-PN 63K
	HG20615 (MPa)	1-150LB(PN2.0)	2-300LB(PN5.0)	3-600LB(PN11)	4-900LB(PN15)	5-1500LB(PN26)	6-2500LB(PN42)	
	HG20592 (MPa)	1-PN0.25, PN0.4	2-PN0.6	3-PN1.0, PN1.6	4-PN2.5, PN4.0	5-PN6.4	6-PN10	7-PN16

**Head Style** Y-Casting 316 Stainless Steel, 1278g-ATEX Certified and FMCUS Certified



# Head Assembly Thermocouple Detector

Explosion Proof Type



## Order Information

\* For Sanitary Style  
Example:



**P-4B**

Process Connection  
**P-4B-SX** **Y** **A** **5** **C** **K** **J2** **S** **A** **C38** **2C5** **S** **000** **N** **S** **3** **H-** **XX**

**Option**  
**ZC**-Certificate of Accuracy (Factory)  
**ZE**-Certificate of Accuracy (TAF)  
**ZI**-Certificate of Accuracy (NIST)  
**ZN**-NACE-MR0175-2002 Heat Treatment  
**ZX**-Oxygen Cleaning  
**ZY**-Stainless Steel Tag Plate  
**KA**-SS Armor Cable  
**KS**-Load Spring  
**TC**-PFA Lining Stem  
Please refer to the options and write down the code which you need.

**Wires** 2-2 wires 4-4 wires 8-8 wires  
3-3 wires 6-6 wires 9-9 wires

**Number of elements** S-Single Element T-Triple Elements  
D-Double Elements

**Type of Junction** G-Grounded E-Exposed L-Others  
U-Ungrounded N-None

**Cable Length** 000-No Wire 01M-1m 10C-10" 10F-10Feet  
050-50mm 10M-10m 50C-50" 50F-50Feet  
200-200mm and so on...

**Electrical Connection** Q-Head-1/2"NPT-F Z-Head-M25\*1.5-F S-Head-M20\*1.5-F  
X-Head-3/4"NPT-F L-Others

**Stem Length** 2C5-2 1/2" 06C-6" 12C-12" 075-75mm 200-200mm  
04C-4" 09C-9" 16C-16" 100-100mm 250-250mm  
24C-24" 150-150mm and so on...

**Stem Diameter** C25-1/4" C38-3/8" C50-1/2" 012-12mm and so on...  
006-6mm 008-8mm 010-10mm

**Stem Material** A-SS304 S-SS316 W-SS316L K-SS310 O-Inconel

**Shank Design** S-Straight R-Stepped T-Tapered

**Class** J1-JIS/DIN Class 1 J2-JIS/DIN Class 2 J3-JIS/DIN Class 3 AT-ASTM Standard AP-ASTM Special

**Sensor Type** K-K-Type E-E-Type J-J-Type T-T-Type N-N-Type  
C-C-Type D-D-Type B-B-Type R-R-Type S-S-Type

**Face** F-Female with Coupling Nut C-Clamp M-Male

**Size** 1-1/2"(DN15) 3-1"(DN25) 5-1 1/2"(DN40) 7-2 1/2"(DN65) 9-4"(DN100)  
2-3/4"(DN20) 4-1 1/4"(DN32) 6-2"(DN50) 8-3"(DN80) A-5"(DN125)

**Design** A-Tri-Clamp B-APC C-Cherry-Tank Spud D-IDF  
E-Cherry-Burrell Line F-SMS G-DIN11851 H-RJT (APV)

**Head Style** Y-Casting 316 Stainless Steel, 1278g-ATEX Certified and FMCUS Certified

# Head Assembly Thermocouple Detector

*Explosion Proof Type*



**P-4B**

## Limited Warranty and Liability

HAWK GAUGE CO.,LTD warrants all its mechanical instruments to be free from defects in materials and workmanship.

HAWK agrees to repair or replace any thermometers if returned to our factory, transportation charges prepaid, and after which examination reveals is to be defective due to faculty workmanship or material.

This warrant should not apply to subject to the following terms and conditions:

- A. The product has not been subjected to misuse, neglect, abuse , accident, incorrect mounting, improper use or misapplication such as negligence, accident, vandalism, shock or vibration.
- B. The performance of any system of which HAWK's products are a component part.
- C. The product has not been exposed to any other service, range or environment of greater severity than that for which the products were designed.
- D. The product has not been altered or repaired by anyone except HAWK GAUGE or its authorized service
- E. The serial number or date code has not been removed, defaced or changed.
- F. The actual pressure&temperature occurring exceed the values specified for HAWK Thermometer.

Unless otherwise specified in a manual or warranty card, or agree to in a writing signed by HAWK GAUGE office, HAWK Process gauge products shall be warranted for one years from the date of sale.

This warranty is in lieu of all other warranties expressed or implied, and of all obligations or liabilities on its part for damages including but not limited to consequential damages, following the use of misuse of instruments sold by it. No agent is authorized to assume for it any liability except as set forth above.

## Note

HAWK GAUGE CO.,LTD reserves the right to make product improvements and change its specifications at any time stated throughout this brochure without notification. Please contact the factory on all critical dimensions and specifications for verification.

HAWK GAUGE is not expert in the customer's technical field and therefore doesn't warrant suitability of it's product for the application selected by customer.



**1971 – 2025**

**Data Sheet No: MKDP4BSXA2-E**